

# PT-DR1A00G-K1

## HD-TVI DVR Series

### Key Feature

- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- HDTVI/AHD/CVI/CVBS/IP video input
- Up to 6/12-ch IP camera inputs (up to 1080p/5 MP)  
Max. 1200 m for 720p HDTVI signal



### Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency, and reduces data storage costs
- Full channel recording at up to 1080p resolution

### Storage and Playback

- 1 SATA interface (up to 4 TB capacity per HDD)
- Smart search for efficient playback

### Network & Ethernet Access

- DDNS (Dynamic Domain Name System) for easy network management
- 64/72 Mbps total bandwidth


## Specification

Model	PT-DR1A04G-K1	PT-DR1A08G-K1
<b>Recording</b>		
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	
Encoding resolution	When 1080p lite mode not enabled: 720p/WD1/4CIF/VGA/CIF When 1080p lite mode enabled: 1080p Lite/HD 720p Lite/WD1/4CIF/VGA/CIF	
Frame rate	Main stream: When 1080p Lite mode not enabled: For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)	Main stream: When 1080p Lite mode not enabled: For 720p stream access: 720p/WD1/4CIF/VGA/CIF@15 fps; For SD stream access: WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)
	When 1080p Lite mode enabled: 1080p Lite/HD 720p Lite/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)	When 1080p Lite mode enabled: 1080p Lite/HD 720p Lite/WD1/4CIF/VGA/CIF@15 fps
	Sub-stream: 4CIF/CIF/QVGA@25 fps (P)/30 fps (N)	Sub-stream: CIF/QVGA@25 fps (P)/30 fps (N)
Video bit rate	32 Kbps to 4 Mbps	
Stream type	Video, Video & Audio	
Audio compression	G.711u	
Audio bit rate	64 Kbps	
<b>Video and Audio</b>		
IP video input	1-ch (up to 5-ch)	2-ch (up to 10-ch)
	Up to 1080p resolution	Up to 5 MP resolution
	Support H.265+/H.265/H.264+/H.264 IP cameras	
Analog video input	4-ch	8-ch
	BNC interface (1.0 Vp-p, 75 Ω)	
HD-TVI input	1080p25, 1080p30, 720p25, 720p30	
AHD input	1080p25, 1080p30, 720p25, 720p30	
HDCVI input	1080p25, 1080p30, 720p25, 720p30	
CVBS input	Support	
HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output	
Audio input	1-ch RCA (2.0 Vp-p, 1 KΩ)	
Audio output	1-ch, RCA (Linear, 1 KΩ)	
Two-way audio	Reuse the first audio input	
Synchronous playback	4-ch	8-ch
<b>Network</b>		
Remote connection	32	64
Network protocol	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS	
Network interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface	
<b>Auxiliary interface</b>		
SATA	1 SATA interface	
Capacity	Up to 4 TB capacity for each disk	
Alarm in/out	N/A	
USB interface	Rear panel: 2 × USB 2.0	

General	
Power supply	12 VDC, 1.5 A
Consumption (without HDD)	≤ 16 W      ≤ 17 W
Working temperature	-10 °C to 55 °C (14 °F to +31 °F)
Working humidity	10% to 90%

\*Specifications are subject to change without prior notice. \*Product picture may differ from the actual.

## Physical Interfaces

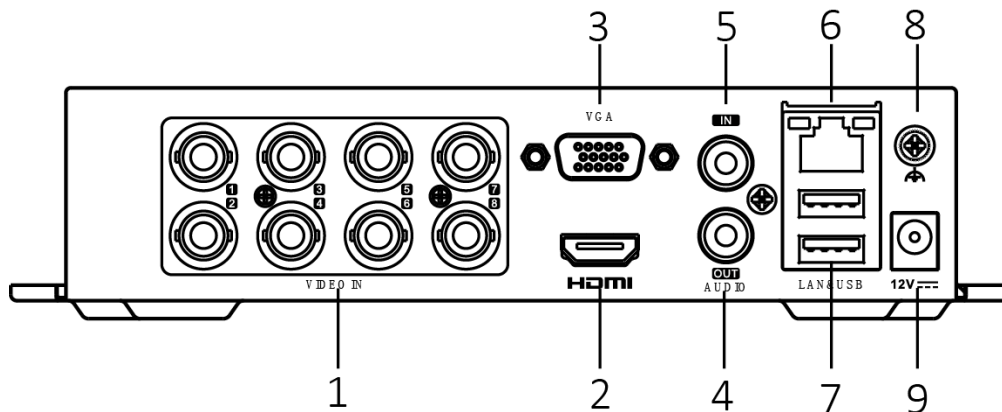

### NOTE

\*The rear panel of PT-DR1A04G-K1 provides 4 video input interfaces.

No.	Description	No.	Description
1	Video and Audio in	6	LAN Network Interface
2	HDMI Interface	7	USB Interfaces
3	VGA Interface	8	GND
4	AUDIO OUT, RCA Connector	9	12 VDC Power Input
5	AUDIO IN, RCA Connector		

## Available Model

PT-DR1A04G-K1, PT-DR1A08G-K1